



# Wilmington DVS Face

Black 99500146

Pewter 99500148

## Compatibility:

- DVS Insert
- DVS Fireplace

## Packing List:

- Face
- (2) Mounting Brackets
- (4) 10-24 x 1/2" Thread-Cutting Screws


## Installation

**WARNING:** Turn off gas to the appliance and make sure it has fully cooled prior to service.

- 1 Remove the glass (see the owner's manual). On inserts, install the surround panels.
- 2 Install the mounting brackets following the directions to the right.
- 3 Start the pilot (make sure the main burner is off), and replace the glass (see the owner's manual). Install the cove covers (see the illustration below).


Attach the mounting brackets to the heater with the included screws.

**HINT:** pre-thread the holes on the heater before installing the brackets.

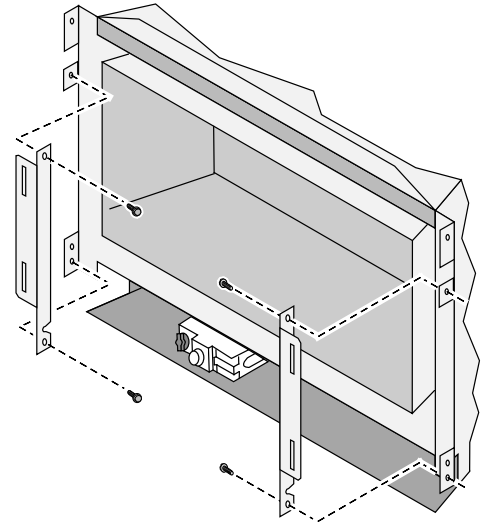


### COVE COVERS - DVS INSERT

The cove covers prevent light from exiting the grill. The DVS Insert includes cove covers. Place them over the glass frame prior to installing the face.




### COVE COVERS - DVS FIREPLACE

The cove cover to prevent light from exiting the grill. It is included with **most DVS Fireplaces or can be ordered separately (SKU 250-00045)**. The cove cover replaces the existing upper glass clip.

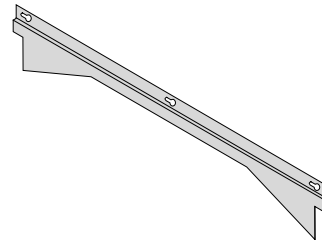


- 4 The face mounts to the brackets as shown in the illustration below.

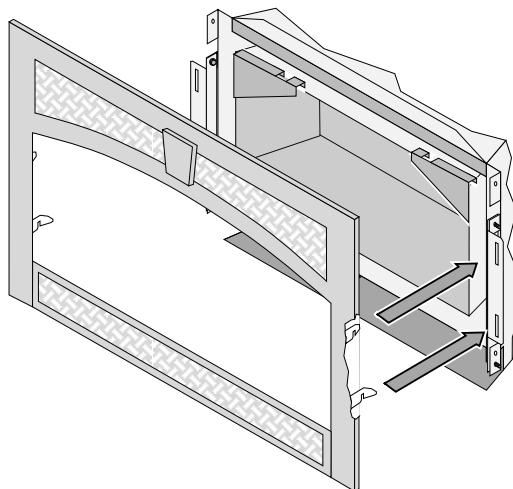

### FACE INSTALLATION

Tilt the face back and insert the bottom brackets into the bottom slot until they lock in place. Lift and rotate the face forward until the top brackets lock into the upper slots.

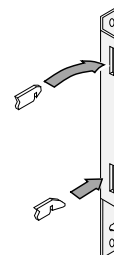

## Plated Surfaces

Use denatured alcohol and a soft cloth to clean plated surfaces. Marks left on the surface may damage the face.

